


Explosion protected linear light fittings

CROUSE-HINDS
SERIES

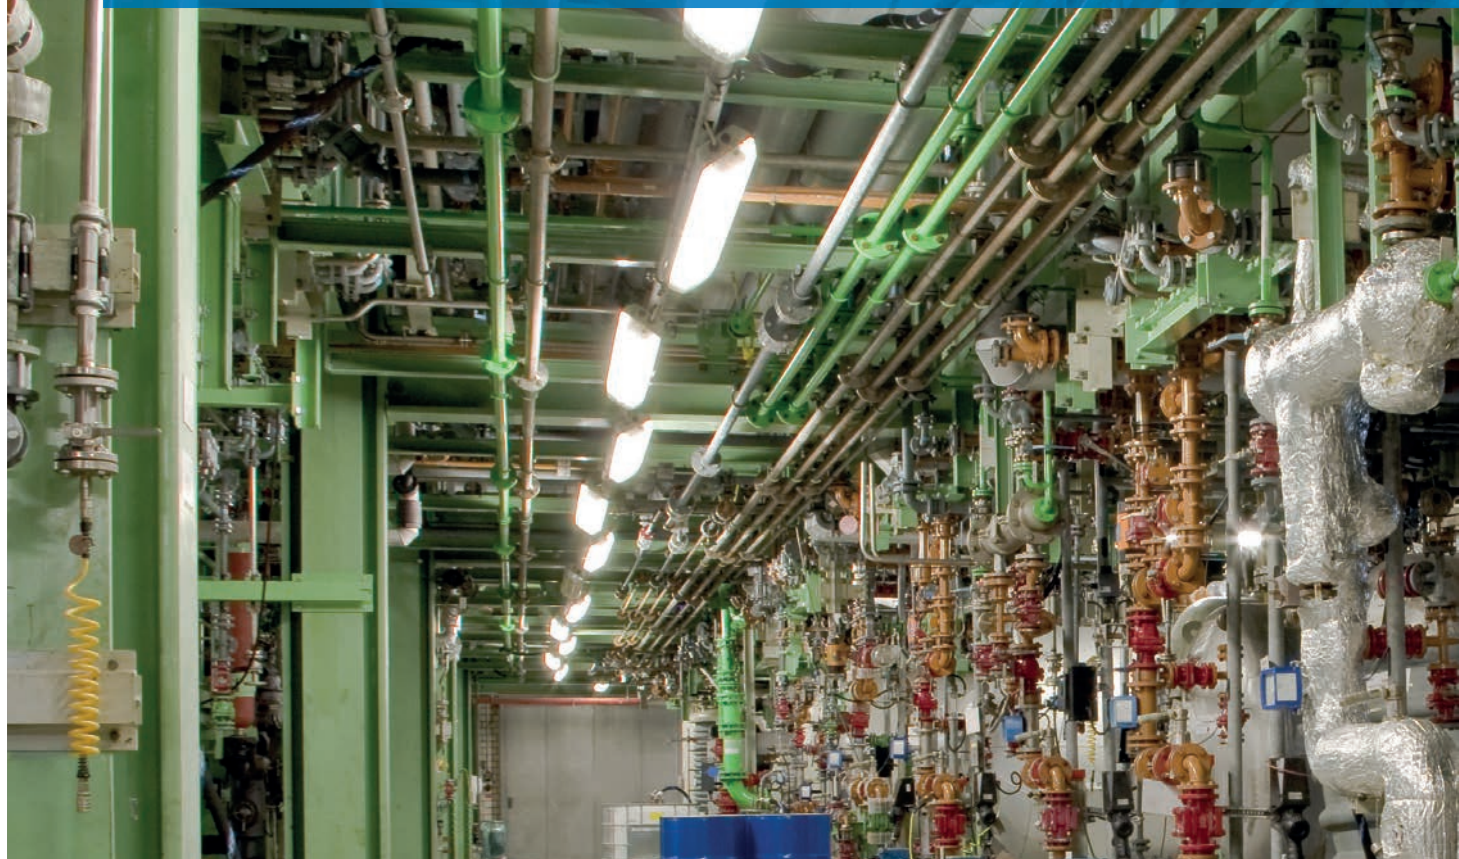

nLLK 15 LED

Ex-Linear LED Light Fittings for Zone 2/22



EATON

Powering Business Worldwide

nLLK 15 LED Ex-Linear Light Fitting

Linear Light Fitting with LED Tubes

The efficient LED solution for your explosion protected lighting engineering

The series of light fittings nLLK 15 LED for Aura UltiLED long life LED tubes combines latest lighting engineering with the requirements of harsh and hazardous environments.

The explosion protected luminaires are approved for use in gas- and dust-Ex-areas fulfilling the requirements of the ATEX directive 94/9/EC. They are designed and tested according to the latest standards for Ex-equipment for use in Zone 2 gas Ex-areas and Zone 22 of dust Ex-areas.

The nLLK 15 LED luminaires are helping to increase your safety and save energy. The clear energy saving and the higher quality of lighting are made by use of

Aura UltiLED long life LED tubes in combination with a special designed electronic driver that will sustainably reduce your cost of operations.

Easy and economically to install

The standard single-sided through-wiring architecture in conjunction with the generously large terminal compartment offers a cost efficient installation. Double-sided lock with latch points allows the protective bow to be hingeable on both sides meaning the fitting can be mounted without having to pay attention to which side is the correct side.



Features

- High Efficient & Energy saving LED technology
- Cost efficient installation due to single sided through wiring
- Easy maintenance by double sided safety lock
- High lumen output
- High degree of protection IP 66

Ordering details

Type	Content	Terminals	Through-wiring single-ended	Through-wiring twin-ended	Cable gland/thread	Threaded plug	Blanking plug	Order No.
nLLK 15 LED 600								
nLLK 15 LED 600 (2 x 8 W)	1/6-1K	1 x 6	x	—	1 x M25, plastic	1 x M25		1 3475 208 001
nLLK 15 LED 600 (2 x 8 W)	2/6-2K	2 x 6	—	x	2 x M25, plastic	2 x M25	1	1 3475 208 011
nLLK 15 LED 600 (2 x 8 W)	1/6-1M ¹⁾	1 x 6	x	—	2 x M20, metal thread	1 x M20		1 3475 208 021
nLLK 15 LED 600 (2 x 8 W)	2/6-2M ¹⁾	2 x 6	—	x	4 x M20, metal thread	2 x M20		1 3475 208 031
nLLK 15 LED 1200								
nLLK 15 LED 1200 (2 x 17 W)	1/6-1K	1 x 6	—	x	1 x M25, plastic	1 x M25		1 3475 217 001
nLLK 15 LED 1200 (2 x 17 W)	2/6-2K	2 x 6	x	—	2 x M25, plastic	2 x M25	1	1 3475 217 011
nLLK 15 LED 1200 (2 x 17 W)	1/6-1M ¹⁾	1 x 6	—	x	2 x M20, metal thread	1 x M20		1 3475 217 021
nLLK 15 LED 1200 (2 x 17 W)	2/6-2M ¹⁾	2 x 6	x	—	4 x M20, metal thread	2 x M20		1 3475 217 031

¹⁾ with metal thread, without cable gland / Metal cable glands see catalogue part 2: 2.3.12 ff

Scope of delivery without lamp and fixing accessories. Please order LED tubes separately.

LED tubes

Type	Application	Luminous flux	Light colour / CR	Length	Order No.
Aura UltiLED Long Life (G4) 840 8W	nLLK 15 LED 600	1.100 lm	4.000 K / R _a 80	600 mm	3 2475 902 002
Aura UltiLED Long Life (G4) 840 17W	nLLK 15 LED 1200	2.220 lm	4.000 K / R _a 80	1200 mm	3 2475 902 004




Technical data

	nLLK 15 LED 600	nLLK 15 LED 1200
EC-Declaration of conformity	CCH 15 ATEX 1044	CCH 15 ATEX 1044
Marking accd. to 94/9/EC and 2014/34/EU	Ⓢ II 3 G Ex ec IIC T4 Gc Ⓢ II 3 D Ex tc IIIC T80 °C Dc	Ⓢ II 3 G Ex ec IIC T4 Gc Ⓢ II 3 D Ex tc IIIC T80 °C Dc
Permissible ambient temperature	-25 °C up to +50 °C (+55 °C on request)	-25 °C up to +45 °C
Lifetime electronic driver	>160,000 h @ 25 °C	>100,000 h @ 25 °C
Lifetime LED tubes	L80/B10 >58,000 h @ 25 °C	L80/B10 >58,000 h @ 25 °C
IK-class according to EN 50102	IK 10 ± 20 J	IK 10 ± 20 J
Rated voltage	220 - 240 V AC / DC	220 - 240 V AC / DC
Rated current	0.096 A	0.173 A
Rated power consumption	18.2 W	36.5 W
Frequency	0/50 - 60 Hz	0/50 - 60 Hz
Power factor cos φ	≥ 0.90	≥ 0.90
Circuit	electronic driver	electronic driver
Protection class	I	I
Lamp / Illuminant	2 x Aura UltiLED long life 8 W	2 x Aura UltiLED long life 17 W
Rated luminous flux	1845 lm ¹⁾	3800 lm ¹⁾
Lamp cap	G5 accord. IEC 60061-1	G5 accord. IEC 60061-1
Dimensions (L x W x H)	760 x 188 x 130 mm	1360 x 188 x 130 mm
Connecting terminals	L, L1, L2, L3, N, PE screw-type terminals max. 6 mm ² single wire	L, L1, L2, L3, N, PE screw-type terminals max. 6 mm ² single wire
Enclosure colour	RAL 7035 light grey	RAL 7035 light grey
Enclosure material	glass-fibre reinforced polyester	glass-fibre reinforced polyester
Weight	3.6 kg	5.8 kg
Cable glands / gland plates / enclosure drilling	Ex e cable glands M 25 x 1.5 (plastic) optional M 20 x 1.5 metal thread ²⁾	Ex e cable glands M 25 x 1.5 (plastic) optional M 20 x 1.5 metal thread ²⁾
Degree of protection accd. to EN 60529	IP66	IP66
Protective cover / protective bowl	Polycarbonate	Polycarbonate


¹⁾ please order the lamps separately

²⁾ with dustcover if entry/thread is not closed



Polar curve nLLK 15 LED 600

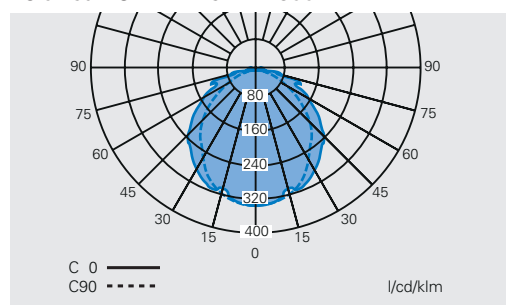

Polar curve nLLK 15 LED 1200

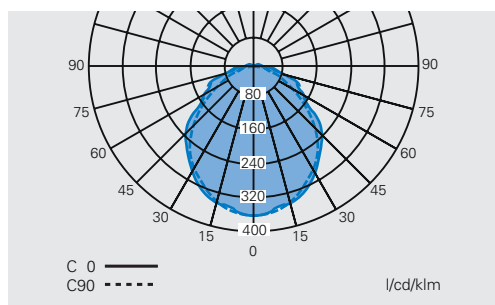

Dimension drawing nLLK 15...

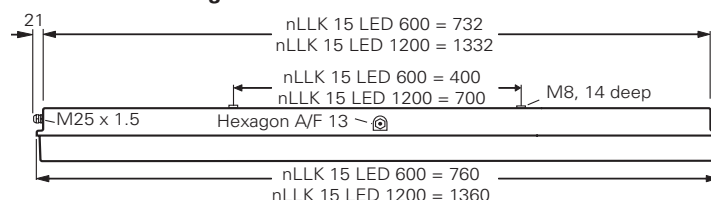

Dimensions in mm



Eaton's Crouse-Hinds Business

The safety you rely on.

See the complete offering of Hazardous and Industrial Products at www.crouse-hinds.de.

U.S. (Global Headquarters): Eaton's Crouse-Hinds Business

1201 Wolf Street
Syracuse, NY 13208

(866) 764-5454
FAX: (315) 477-5179
FAX Orders Only:
(866) 653-0640

CrouseCustomerCTR@Eaton.com

For more information:

If further assistance is required, please contact an authorized Eaton Distributor, Sales Office, or Customer Service Department.

Australia

Phone +61-2-8787-2777
Fax +61-2-9609-2342
crousehindsanz@eaton.com

China

Phone +86-21-2899-3600
Fax +86-21-2899-4055
ECHsales@eaton.com

Great Britain

Phone +44-247-630-89 30
Fax +44-247-630-10 27
sales5@eaton.com

India

Phone +91-124-4683888
Fax +91-124-4683899
cchindia@eaton.com

Canada

Toll Free +1-800-265-0502
Fax +1-800-263-9504
Fax orders only:
+1-866-653-0645

Korea

Phone +82-2-3484-6783
Fax +82-2-3484-6778
CCHK-sales@cooperindustries.com

Mexico/Latin America/ Caribbean

Phone +52-555-804-4000
Fax +52-555-804-4020
mxmercadotecnica@cooperindustries.com

Spain

Phone +34-9-37362710
Fax +34-9-37835055
sales.CCH.es@cooperindustries.com

Middle East (Dubai)

Phone +971-4-427-2522 / 2500
Fax +971-4-429-8521
CHMEsales@Eaton.com

The Netherlands

Phone +31-10-2452145
Fax +31-10-2452121
CHRD_mail@Eaton.com

Norway

Phone +47-32-244600
Fax +47-32-244646
CHLloffice@eaton.com

Singapore:

Phone +65-6645-9888
Fax +65-6297-4819
CHSI-Sales@Eaton.com

Turkey

Phone +90-216-464-20-20
Fax +90-216-464-20-10
infoEGTurkey@eaton.com

Russia

Phone +7-495 510-24-27
Fax +7-495 510-24-28
info@cooper.ru.com
www.cooper-russia.ru

Eaton's Crouse-Hinds Business

Neuer Weg – Nord 49
D-69412 Eberbach

Phone +49 (0) 6271/806-500
Fax +49 (0) 6271/806-476
E-mail info-ex@eaton.com
Internet www.crouse-hinds.de

Eaton

1000 Eaton Boulevard
Cleveland, OH 44122
United States
Eaton.com

© 2015 Eaton Corporation
All Rights Reserved
Printed in Germany
Publication No. BR 300 8000
December 2015

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions. Only order confirmations and technical documentation by Eaton is binding. Photos and pictures also do not warrant a specific layout or functionality. Their use in whatever form is subject to prior approval by Eaton. The same applies to Trademarks (especially Eaton, Moeller, and Cutler-Hammer). The Terms and Conditions of Eaton apply, as referenced on Eaton Internet pages and Eaton order confirmations.

Eaton's Crouse-Hinds Business

1201 Wolf Street
Syracuse, NY 13208
(866) 764-5454
CrouseCustomerCTR@Eaton.com

Eaton is a registered trademark.

All other trademarks are property of their respective owners.



Powering Business Worldwide