

GuideLed SL 13851, 13852 CGLine+

Ceiling recessing, ceiling surface-mounting for illuminance of 5 lx vertically

Requirements of EN 1838: illuminance of 5 lx for safety equipment

The aim of emergency lighting is to enable people to exit a room or building safely. It must also ensure that fire fighting and safety equipment can be easily found and operated when needed. This equipment includes (but not exclusively):

- First aid stations
- All fire fighting equipment and all alarm devices


Lighting is required near each first aid kit, near each alarm and piece of fire fighting equipment, as well as each sign indicating a fire alarm system. In accordance with EN 1838, „near“ generally means a distance of no greater than 2 metres, measured horizontally (this corresponds with Distance a in the diagram below).

The required level of illuminance on the equipment is 5 lx measured vertically- i.e. perpendicular to the usual horizontal illuminance measurements on one level.


In comparison to the escape route requirement for 1 lx horizontally, different requirements apply in this situation for the light distribution from the safety luminaires, due to the flatter light angle of incidence.

GuideLed SL 13851 and 13852 CGLine+ meet the specific requirements of EN 1838

In order to meet the requirements of EN 1838, the new GuideLed SL 13851 and 13852 CGLine+ have special optics to guarantee the required illuminance of 5 lx vertically over a wide area. Hence mounting at heights of up to 5.6 m, and a breadth of illumination of up to 2.8 metres, are possible.

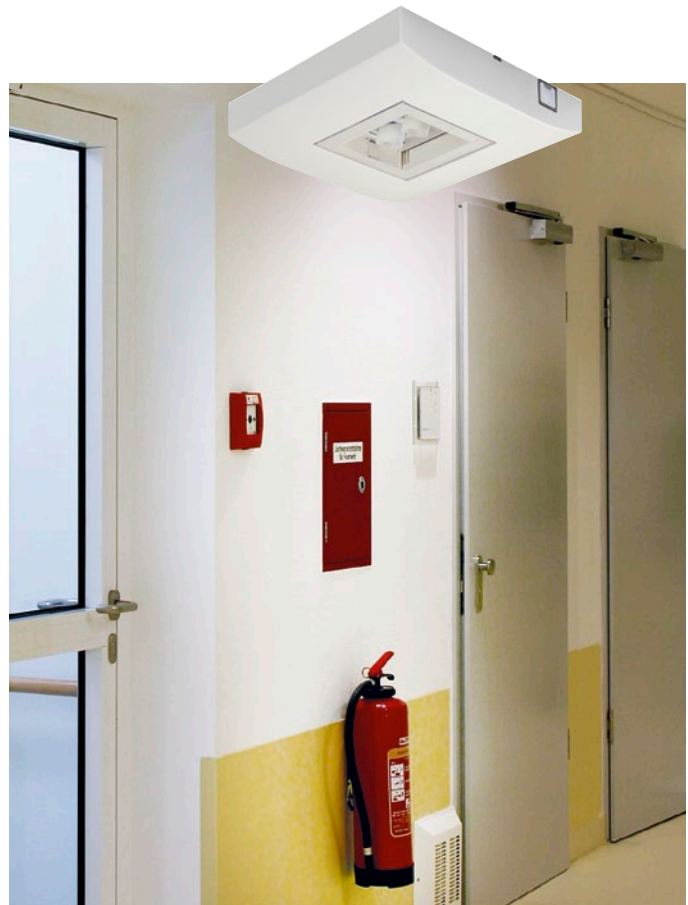

Engineering help, GuideLed SL 13851 and 13852 CGLine+

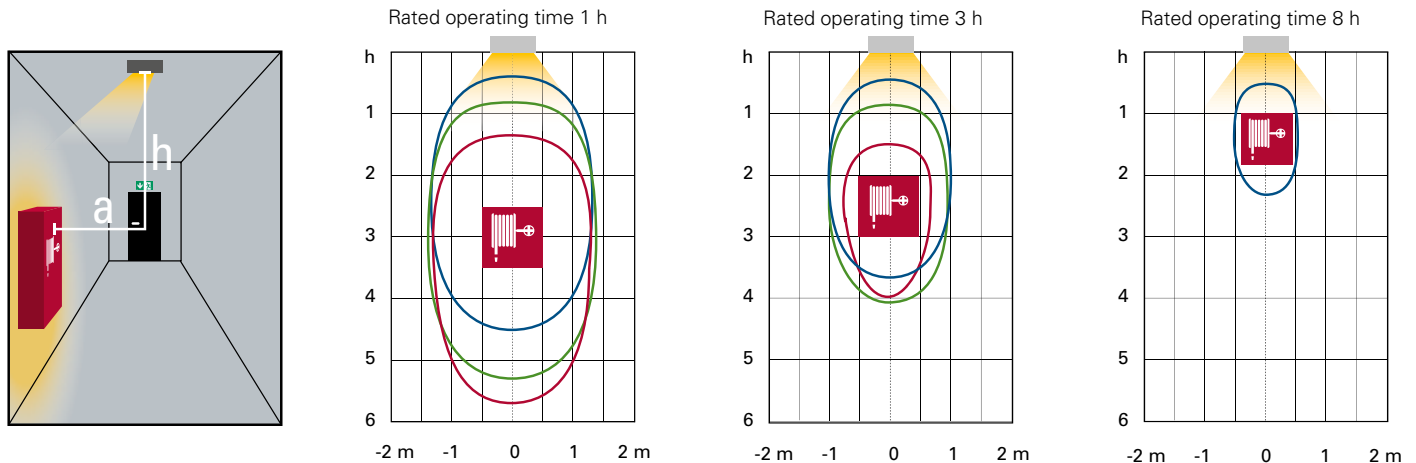

Area in which a minimum illuminance of 5 lx (maintenance factor 0.8) is achieved, depending on distance a and the rated operating time:


a = 1,0 m

a = 1,5 m

a = 2,0 m

GuideLed SL 13851, 13852 CGLine+

Ceiling recessing, ceiling surface-mounting for illuminance of 5 lx vertically




GuideLed SL 13851, 13852 CGLine+

- LED self-contained safety luminaire with automatic test for reduced inspection effort
- Universal use for maintained and non-maintained operation and for 1 h, 3 h or 8 h operation
- For autonomous installation or connection to the CGLine+ monitoring system
- Environmentally-friendly due to modern lithium ion technology
- Low operating costs via low connected load
- Minimum maintenance effort via high LED service life (50,000 hours)
- Special asymmetric optics for illumination of 5 lx vertically for first aid stations, fire fighting equipment and safety equipment acc. to EN 1838
- Simple fault analysis and status display via bicolor LED and testing button
- 1 minute switch-back delay after mains return
- Blocking function prevents unintended discharge during idle operating times (only with CGLine+ WEB-Controller)

GuideLed SL 13851 CGLine+



GuideLed SL 13852 CGLine+





Light distribution curve
GuideLed SL 13851, 13852 CGLine+

| | |
|--|---|
| Luminous flux Φ_N (mains operation) | 310 lm |
| Luminous flux Φ_E/Φ_N at end of rated operating time | 100 % at 1 h; 65 % at 3 h; 25 % at 8 h |
| Housing material | Polycarbonate, aluminium |
| Housing colour | White, similar to RAL 9010 |
| Weight | 0.62 kg (13851 CGLine) 0.86 kg (13852 CGLine) |
| Type of mounting | Ceiling recessing, ceiling surface-mounting |
| Terminals | Through-wiring from mains (L, L', N, PE) to 2.5 mm ² CGLine Bus through wiring to 1.5 mm ² |
| Connection voltage | 220- 240 V AC, 50 Hz |
| Power consumption mains operation (apparent power/effective power) | 6.9 VA / 6.7 W |
| Permissible ambient temperature | Maintained mode -5 °C bis +30 °C Non-maintained mode 0 °C bis +35 °C |
| Battery | Lithium-Ion 3.7 V/4000 mAh with multiple protective circuit |
| Light source | HighPower LEDs 2 x 1.6 W |



Ordering details

| Scope of supply | Order No. |
|--|-------------|
| GuideLed SL 13851 1-8h/D CGLine+, ceiling recessed with asymmetric optics for illuminance of 5 lx vertically, clamping range for ceiling thickness 0-20 mm | 40071353280 |
| GuideLed SL 13852 1-8h/D CGLine+, ceiling surface-mounted with asymmetric optics for illuminance of 5 lx vertically | 40071353282 |

GuideLed SL 13851 CGLine+

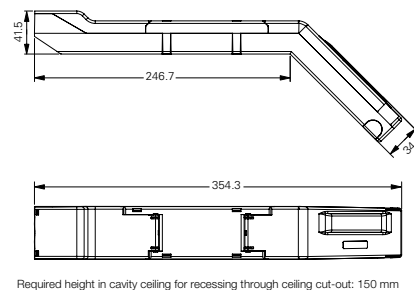

GuideLed SL 13852 CGLine+

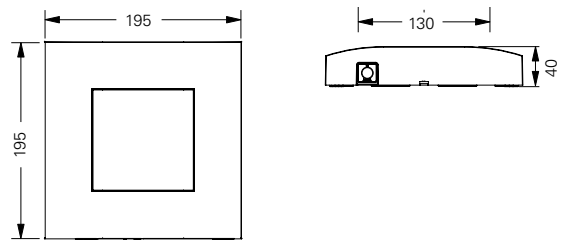

* 13851: Protection class 2
13852: Protection class 1
Degree of protection of the luminaire
13851: IP41
Degree of protection of the housing: IP20