


GuideLed 11025, 11026 CG-S

- Escape sign panel luminaire in LED technology for ceiling installation
- Slender design with pictogram width of only 12 mm
- Very good perceptibility on account of high luminance of the white contrasting colour > 500 cd/m² in keeping with standard ISO 3864-1 and high uniformity $L_{min}/L_{max} > 0.8$
- Increased safety by use of 3-chip LEDs
- Reduced battery costs on account of especially low power consumption
- Low operating costs on account of low effective power of 2.9W only (1.9W one-sided, radiating)
- Minimum service requirement due to high service life of the LEDs (50,000 hours)

GuideLed 11025 CG-S

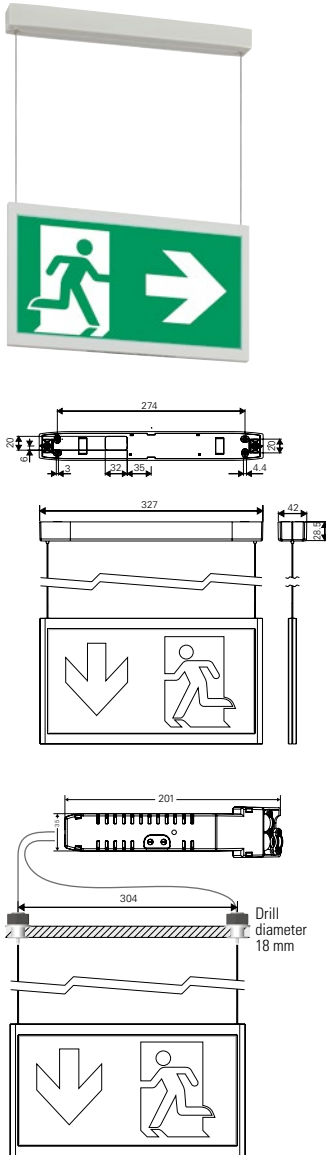

GuideLed 11026 CG-S

Viewing distance	30 m
Luminous flux Φ_E/Φ_N at the end of rated operating time	100 %
Housing material	PC, PMMA
Housing colour	Light grey RAL 7035
Weight	0.81 kg (11025 LED CG-S) 0.93 kg (11026 LED CG-S)
Type of mounting	Suspended installation (max. 1.5 m)
Connection terminal	Clamp terminal 2.5 mm ²
Connection voltage	220 - 240 V AC, 50/60 Hz 176 V - 275 V DC
Current consumption - battery operation (220 V)	one-sided 11 mA – two-sided 17 mA
Power consumption mains operation (apparent power / effective power)	one-sided 5.0 VA / 2.6 W two-sided 7.1 VA / 4.1 W
Permissible ambient temperature	-20 °C to +40 °C
Light source	LED batten with 3-chip LEDs

Ordering details - fastening set

Scope of supply	Order No.
Rope installation set for 11025 CG-S with LED supply and CG-S technology (20 addresses) integrated in the canopy	40071353619
Rope installation set for GuideLed 11026/11026 CG-S with ceiling rope holder, LED supply and CG-S technology (20 addresses) integrated in a housing with strain relief	40071353640

Ordering details - LED pictograms

Scope of supply	Order No.
LED pictogram PL/PR for GuideLed 11025/11026 CG-S (rope installation), ISO 7010, 30 m	40071354540
LED pictogram PU/PU for GuideLed 11025/11026 CG-S (rope installation), ISO 7010, 30 m	40071354541
LED pictogram PL/BL for GuideLed 11025/11026 CG-S (rope installation), ISO 7010, 30 m	40071354542
LED pictogram PR/BL for GuideLed 11025/11026 CG-S (rope installation), ISO 7010, 30 m	40071354543
LED pictogram PU/BL for GuideLed 11025/11026 CG-S (rope installation), ISO 7010, 30 m	40071354544