


# CROUSE-HINDS SERIES

Explosion protected linear light fittings



nLLK 15 LED  
Ex-Linear LED Light Fittings for Zone 2/22

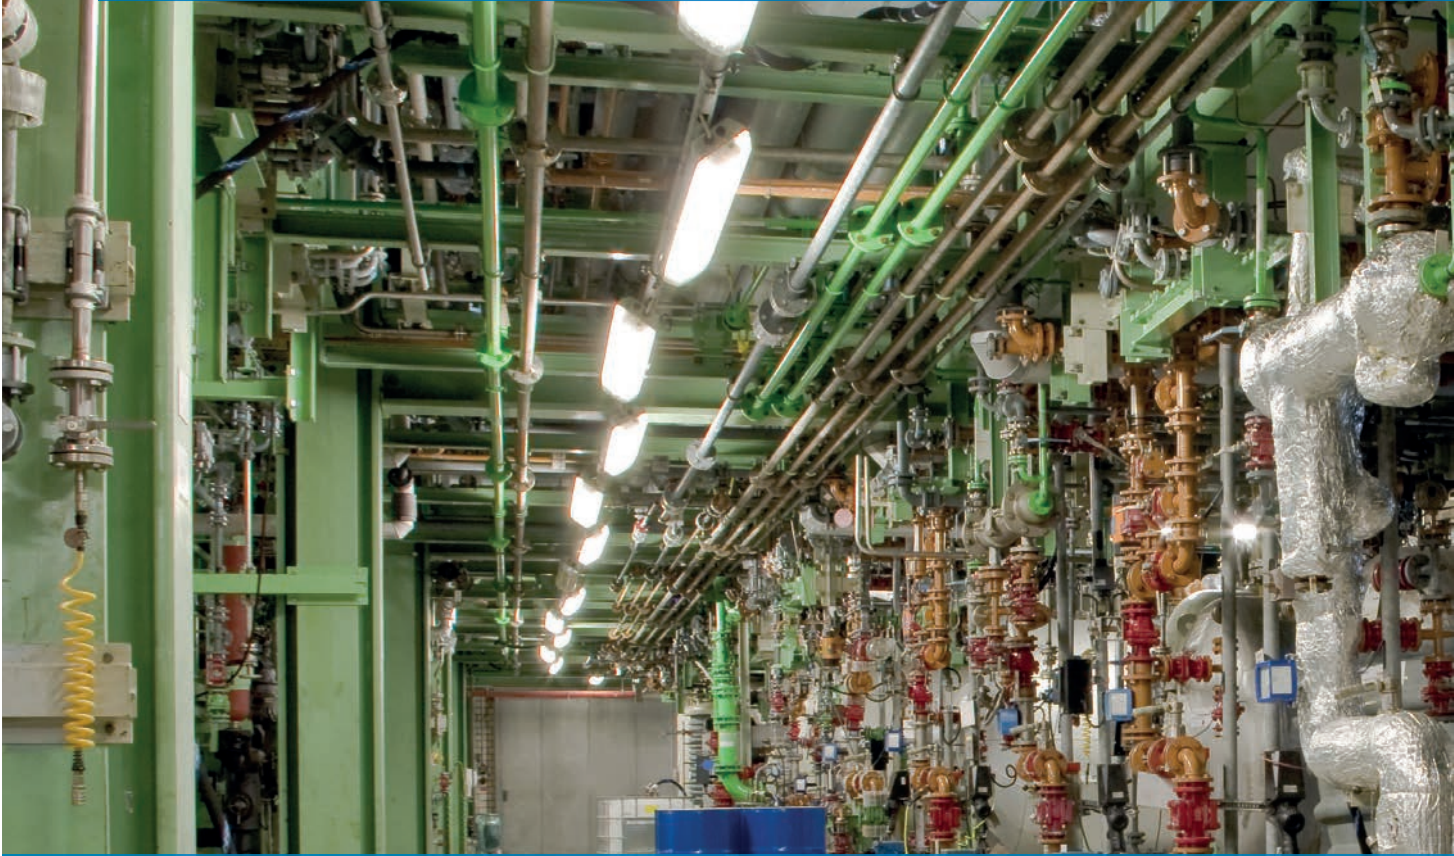

**EATON**

*Powering Business Worldwide*

# nLLK 15 LED Ex-Linear Light Fitting

## Linear Light Fitting with LED Tubes

### The efficient LED solution for your explosion protected lighting engineering

The series of light fittings nLLK 15 LED for Aura UltiLED long life LED tubes combines latest lighting engineering with the requirements of harsh and hazardous environments.

The explosion protected luminaires are approved for use in gas- and dust-Ex-areas fulfilling the requirements of the ATEX directive 94/9/EC. They are designed and tested according to the latest standards for Ex-equipment for use in Zone 2 gas Ex-areas and Zone 22 of dust Ex-areas.

The nLLK 15 LED luminaires are helping to increase your safety and save energy. The clear energy saving and the higher quality of lighting are made by use of

Aura UltiLED long life LED tubes in combination with a special designed electronic driver that will sustainably reduce your cost of operations.

### Easy and economically to install



The standard single-sided through-wiring architecture in conjunction with the generously large terminal compartment offers a cost efficient installation. Double-sided lock with latch points allows the protective bow to be hingeable on both sides meaning the fitting can be mounted without having to pay attention to which side is the correct side.



### Features

- High Efficient & Energy saving LED technology
- Cost efficient installation due to single sided through wiring
- Easy maintenance by double sided safety lock
- High lumen output
- High degree of protection IP 66


### Ordering details

Type	Content	Terminals	Through-wiring single-ended	Through-wiring twin-ended	Cable gland/thread	Threaded plug	Blanking plug	Order No.
<b>nLLK 15 LED 600</b>								
 nLLK 15 LED 600 (2 x 8 W)	1/6-1K	1 x 6	x	–	1 x M25, plastic	1 x M25		<b>1 3475 208 001</b>
nLLK 15 LED 600 (2 x 8 W)	2/6-2K	2 x 6	–	x	2 x M25, plastic	2 x M25	1	<b>1 3475 208 011</b>
nLLK 15 LED 600 (2 x 8 W)	1/6-1M <sup>1)</sup>	1 x 6	x	–	2 x M20, metal thread	1 x M20		<b>1 3475 208 021</b>
nLLK 15 LED 600 (2 x 8 W)	2/6-2M <sup>1)</sup>	2 x 6	–	x	4 x M20, metal thread	2 x M20		<b>1 3475 208 031</b>
<b>nLLK 15 LED 1200</b>								
 nLLK 15 LED 1200 (2 x 17 W)	1/6-1K	1 x 6	–	x	1 x M25, plastic	1 x M25		<b>1 3475 217 001</b>
nLLK 15 LED 1200 (2 x 17 W)	2/6-2K	2 x 6	x	–	2 x M25, plastic	2 x M25	1	<b>1 3475 217 011</b>
nLLK 15 LED 1200 (2 x 17 W)	1/6-1M <sup>1)</sup>	1 x 6	–	x	2 x M20, metal thread	1 x M20		<b>1 3475 217 021</b>
nLLK 15 LED 1200 (2 x 17 W)	2/6-2M <sup>1)</sup>	2 x 6	x	–	4 x M20, metal thread	2 x M20		<b>1 3475 217 031</b>

<sup>1)</sup> with metal thread, without cable gland / Metal cable glands see catalogue part 2: 2.3.12 ff

Scope of delivery without lamp and fixing accessories. Please order LED tubes separately.

### LED tubes

Type	Application	Luminous flux	Light colour / CR	Length	Order No.
 Aura UltiLED Long Life (G4) 840 8W	nLLK 15 LED 600	1.100 lm	4.000 K / R <sub>a</sub> 80	600 mm	<b>3 2475 902 002</b>
Aura UltiLED Long Life (G4) 840 17W	nLLK 15 LED 1200	2.220 lm	4.000 K / R <sub>a</sub> 80	1200 mm	<b>3 2475 902 004</b>




## Technical data

	nLLK 15 LED 600	nLLK 15 LED 1200
EC-Declaration of conformity	CCH 15 ATEX 1044	CCH 15 ATEX 1044
Marking accd. to 94/9/EC and 2014/34/EU	⊕ II 3 G Ex ec IIC T4 Gc ⊕ II 3 D Ex tc IIIC T80 °C Dc	⊕ II 3 G Ex ec IIC T4 Gc ⊕ II 3 D Ex tc IIIC T80 °C Dc
Permissible ambient temperature	-25 °C up to +50 °C (+55 °C on request)	-25 °C up to +45 °C
Lifetime electronic driver	>160,000 h @ 25 °C	>100,000 h @ 25 °C
Lifetime LED tubes	L80/B10 >58,000 h @ 25 °C	L80/B10 >58,000 h @ 25 °C
IK-class according to EN 50102	IK 10 ± 20 J	IK 10 ± 20 J
Rated voltage	220 - 240 V AC / DC	220 - 240 V AC / DC
Rated current	0.096 A	0.173 A
Rated power consumption	18.2 W	36.5 W
Frequency	0/50 - 60 Hz	0/50 - 60 Hz
Power factor cos φ	≥ 0.90	≥ 0.90
Circuit	electronic driver	electronic driver
Protection class	I	I
Lamp / Illuminant	2 x Aura UltiLED long life 8 W	2 x Aura UltiLED long life 17 W
Rated luminous flux	1845 lm <sup>1)</sup>	3800 lm <sup>1)</sup>
Lamp cap	G5 accord. IEC 60061-1	G5 accord. IEC 60061-1
Dimensions (L x W x H)	760 x 188 x 130 mm	1360 x 188 x 130 mm
Connecting terminals	L, L1, L2, L3, N, PE screw-type terminals max. 6 mm <sup>2</sup> single wire	L, L1, L2, L3, N, PE screw-type terminals max. 6 mm <sup>2</sup> single wire
Enclosure colour	RAL 7035 light grey	RAL 7035 light grey
Enclosure material	glass-fibre reinforced polyester	glass-fibre reinforced polyester
Weight	3.6 kg	5.8 kg
Cable glands / gland plates / enclosure drilling	Ex e cable glands M 25 x 1.5 (plastic) optional M 20 x 1.5 metal thread <sup>2)</sup>	Ex e cable glands M 25 x 1.5 (plastic) optional M 20 x 1.5 metal thread <sup>2)</sup>
Degree of protection accd. to EN 60529	IP66	IP66
Protective cover / protective bowl	Polycarbonate	Polycarbonate


<sup>1)</sup> please order the lamps separately

<sup>2)</sup> with dustcover if entry/thread is not closed



## Polar curve nLLK 15 LED 600

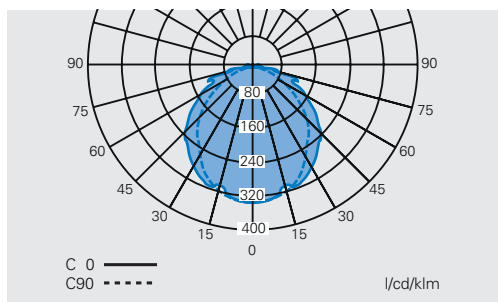

## Polar curve nLLK 15 LED 1200

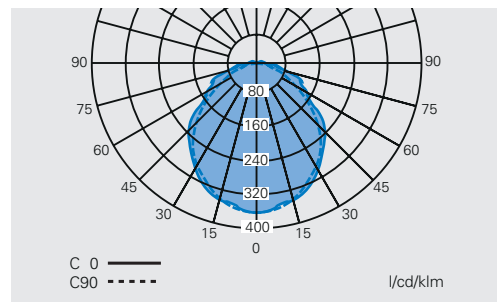

## Dimension drawing nLLK 15...

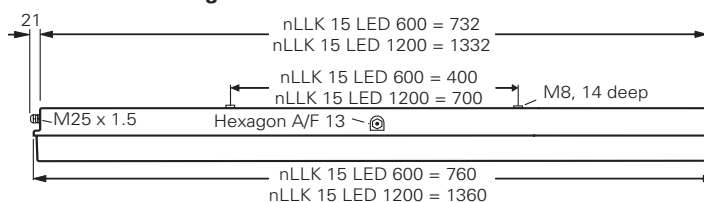

Dimensions in mm



Eaton's Crouse-Hinds Business

# The safety you rely on.

See the complete offering of Hazardous and Industrial Products at [www.crouse-hinds.de](http://www.crouse-hinds.de).

**U.S. (Global Headquarters):  
Eaton's Crouse-Hinds  
Business**

1201 Wolf Street  
Syracuse, NY 13208

(866) 764-5454  
FAX: (315) 477-5179  
FAX Orders Only:  
(866) 653-0640

[CrouseCustomerCTR@Eaton.com](mailto:CrouseCustomerCTR@Eaton.com)

**For more information:**

If further assistance is required, please contact an authorized Eaton Distributor, Sales Office, or Customer Service Department.

**Australia**

Phone +61-2-8787-2777  
Fax +61-2-9609-2342  
[crousehindsanz@eaton.com](mailto:crousehindsanz@eaton.com)

**China**

Phone +86-21-2899-3600  
Fax +86-21-2899-4055  
[ECHsales@eaton.com](mailto:ECHsales@eaton.com)

**Great Britain**

Phone +44-247-630-89 30  
Fax +44-247-630-10 27  
[sales5@eaton.com](mailto:sales5@eaton.com)

**India**

Phone +91-124-4683888  
Fax +91-124-4683899  
[cchindia@eaton.com](mailto:cchindia@eaton.com)

**Canada**

Toll Free +1-800-265-0502  
Fax +1-800-263-9504  
Fax orders only:  
+1-866-653-0645

**Korea**

Phone +82-2-3484-6783  
Fax +82-2-3484-6778  
CCHK-sales@  
[cooperindustries.com](mailto:cooperindustries.com)

**Mexico/Latin America/  
Caribbean**

Phone +52-555-804-4000  
Fax +52-555-804-4020  
[mxmercadotecnia@cooperindustries.com](mailto:mxmercadotecnia@cooperindustries.com)

**Spain**

Phone +34-9-37362710  
Fax +34-9-37835055  
[sales.CCH.es@cooperindustries.com](mailto:sales.CCH.es@cooperindustries.com)

**Middle East (Dubai)**

Phone +971-4-427-2522 / 2500  
Fax +971-4-429-8521  
[CHMEsales@Eaton.com](mailto:CHMEsales@Eaton.com)

**The Netherlands**

Phone +31-10-2452145  
Fax +31-10-2452121  
[CHRD\\_mail@Eaton.com](mailto:CHRD_mail@Eaton.com)

**Norway**

Phone +47-32-244600  
Fax +47-32-244646  
[CHLloffice@eaton.com](mailto:CHLloffice@eaton.com)

**Singapore:**

Phone +65-6645-9888  
Fax +65-6297-4819  
[CHSI-Sales@Eaton.com](mailto:CHSI-Sales@Eaton.com)

**Turkey**

Phone +90-216-464-20-20  
Fax +90-216-464-20-10  
[infoEGTurkey@eaton.com](mailto:infoEGTurkey@eaton.com)

**Russia**

Phone +7-495 510-24-27  
Fax +7-495 510-24-28  
[info@cooper.ru.com](mailto:info@cooper.ru.com)  
[www.cooper-russia.ru](http://www.cooper-russia.ru)

**Eaton's Crouse-Hinds Business**

Neuer Weg – Nord 49  
D-69412 Eberbach

Phone +49 (0) 6271/806-500  
Fax +49 (0) 6271/806-476  
E-mail [info-ex@eaton.com](mailto:info-ex@eaton.com)  
Internet [www.crouse-hinds.de](http://www.crouse-hinds.de)

**Eaton**

1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
[Eaton.com](http://Eaton.com)

© 2015 Eaton Corporation  
All Rights Reserved  
Printed in Germany  
Publication No. BR 300 8000  
December 2015

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions. Only order confirmations and technical documentation by Eaton is binding. Photos and pictures also do not warrant a specific layout or functionality. Their use in whatever form is subject to prior approval by Eaton. The same applies to Trademarks (especially Eaton, Moeller, and Cutler-Hammer). The Terms and Conditions of Eaton apply, as referenced on Eaton Internet pages and Eaton order confirmations.



Powering Business Worldwide

**Eaton's Crouse-Hinds Business**

1201 Wolf Street  
Syracuse, NY 13208  
(866) 764-5454  
[CrouseCustomerCTR@Eaton.com](mailto:CrouseCustomerCTR@Eaton.com)

Eaton is a registered trademark.

All other trademarks are property of their respective owners.