



Stainless steel

1

Technical data

Cable reel stainless steel


Marking accd. to 94/9/EC	⊕ II 2 G Ex de IIC T6
EC-Type Examination Certificate	PTB 08 ATEX 1073
Permissible ambient temperature	-20 °C ... +55 °C ¹⁾
Rated voltage	3-pole: 415 V 5-pole: 500 V (690 V up to 5 h)
Rated current	16 A/32 A
Frequency	50/60 Hz
External back up fuse	without thermal protection: 16 A with thermal protection: 25 A gL (rated current 16 A set to)
Protection class	I
Degree of protection accd. to EN 60529	IP54
Weight	16 A with 20 m connecting cable approx. 22 - 30 kg design depending / 32 A with 20 m connecting cable approx. 28 - 50 kg design depending
Enclosure material	Cable reel: enclosure stainless steel Plug and flange socket: polyamide

¹⁾ extended temperature range on request

Ordering details

Design	Version	Order No.
Stainless steel 16 A design with 20 m connecting cable HO7...		
1 x Flange socket 16 A 3-pole		
1 x Flange socket 16 A 5-pole	5 x 2.5 mm ²	GHG 931 0003 R0031
3 x Flange socket 16 A 3-pole	3 x 2.5 mm ²	GHG 931 0003 R0032
2 x Flange socket 16 A 5-pole	5 x 2.5 mm ²	GHG 931 0003 R0033
Stainless steel 16 A design with 20 m connecting cable HO7...		
2 x Flange socket 32 A 4-pole	4 x 4 mm ²	GHG 931 0003 R0034
2 x Flange socket 32 A 5-pole	5 x 4 mm ²	GHG 931 0003 R0035
1 x Flange socket 16 A 5-pole		
1 x Flange socket 32 A 5-pole	5 x 4 mm ²	GHG 931 0003 R0036

Dimension drawing

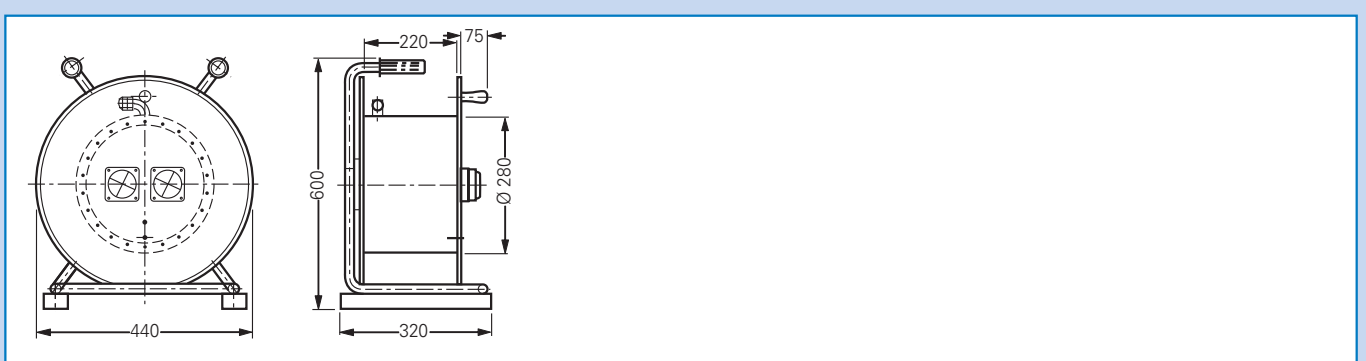

Dimensions in mm