



CABLE JUNCTION BOX

# WKE 203 RK



## WKE 203 RK


Cable junction box

**CUSTOMIZABLE**

115 x 115 x 93 mm  
Article number: 86220301

Cable junction and connection box with IP66 certified acc. EN 60670, with electrical functional integrity E30 acc. to DIN 4102 Part 12, with insulation integrity FE180 acc. IEC 60331-11 as well as functional class F400 acc. EN 12101, enclosure and terminal strips made from halogen-free special duroplastic

Junction box 3-pole, termination capability for each pole 4 x 0.5 - 4 mm<sup>2</sup>, Accessories supplied:, Wall plug set  $\varnothing$  6 mm, 3 cable glands M25, seal range 6 - 15 mm

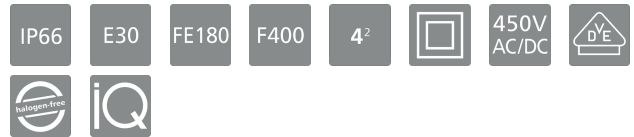

## Technical data

### Measures

Width:	115 mm
Length:	115 mm
Height:	93 mm

### Material

Base:	Duroplastic
Cover:	Duroplastic
Sealing:	Polyurethane
Cover screw:	Stainless steel V4A

## Certificates



## Accessory

KVS - Cable gland protection

WKE 200 ABL - External attachment set

## Environmental attributes

Ambient temperature (min.):	-25 °C
Ambient temperature (max.):	40 °C
Ambient temperature (24 h):	35 °C
Max. rel. humidity at 25° C (short term):	95%
Max. rel. humidity at 40° C:	50%



CABLE JUNCTION BOX

# WKE 203 RK

## Other attributes

Color:	orange
Entries:	3
Rated cross section:	4 mm <sup>2</sup>
Tackable:	No
Rated insulation voltage AC:	450 V
Explosion safety:	none
Functional integrity:	E 30
sealable:	No
Heavy metals-free:	Yes
PVC-free:	Yes
Silicone-free:	Yes
Ingress protection:	IP66 - acc. EN 60529 / DIN VDE 0470-1
weatherproof:	Yes
Equipment:	Terminal